

**SB1-473-3-5**

**Spec. #: SB1-21305**

## Microchip Laser



### MAIN FEATURES

- 473 nm
- < 2 ns
- > 3 uJ
- Single Longitudinal Mode
- All-In-One Miniature Design

### Technical Specifications

Output Wavelength	473	nm
Pulse Repetition Rate	5	kHz
Pulse energy	> 3	uJ
Pulse Width	< 2	ns
Peak Power	> 1	kW
Short Term Output Energy Instability (St.Dev. Over > 10000 samples)	< 3 %	
Long Term Output Power Instability (Power log over 24 hours)	< 5 %	
Beam Quality (M <sup>2</sup> )	< 1.5	
Output Beam Dimensions (H x V) at Exit Aperture (1/e <sup>2</sup> ) without beam expander	< 0.25 x 0.2	mm
Beam Divergence (H x V, half angle) without beam expander	< 0.7 x 4	mrad
Beam Ellipticity (axes ratio)	> 0.80	
Warm Up time after cold start	< 5	min
Power Consumption	< 20	W
Mechanical Package	SB1	
Operational Temperature Range	+10°C to +40°C	
Storage Temperature Range	-20°C to +60°C	

All information included in this document are subject to change without notice.

Updated data sheets can be provided on request.

For further details, please contact your local **Bright Microlaser** sales representative or visit our website at [www.brightmicrolaser.com](http://www.brightmicrolaser.com)


#### **Bright Microlaser Srl**

Via Artigiani, 21  
27010 Cura Carpignano - PV  
Italy

**Phone:** +39 0382 583094

**e-mail:** [info@brightmicrolaser.com](mailto:info@brightmicrolaser.com)

## Mechanical Drawings

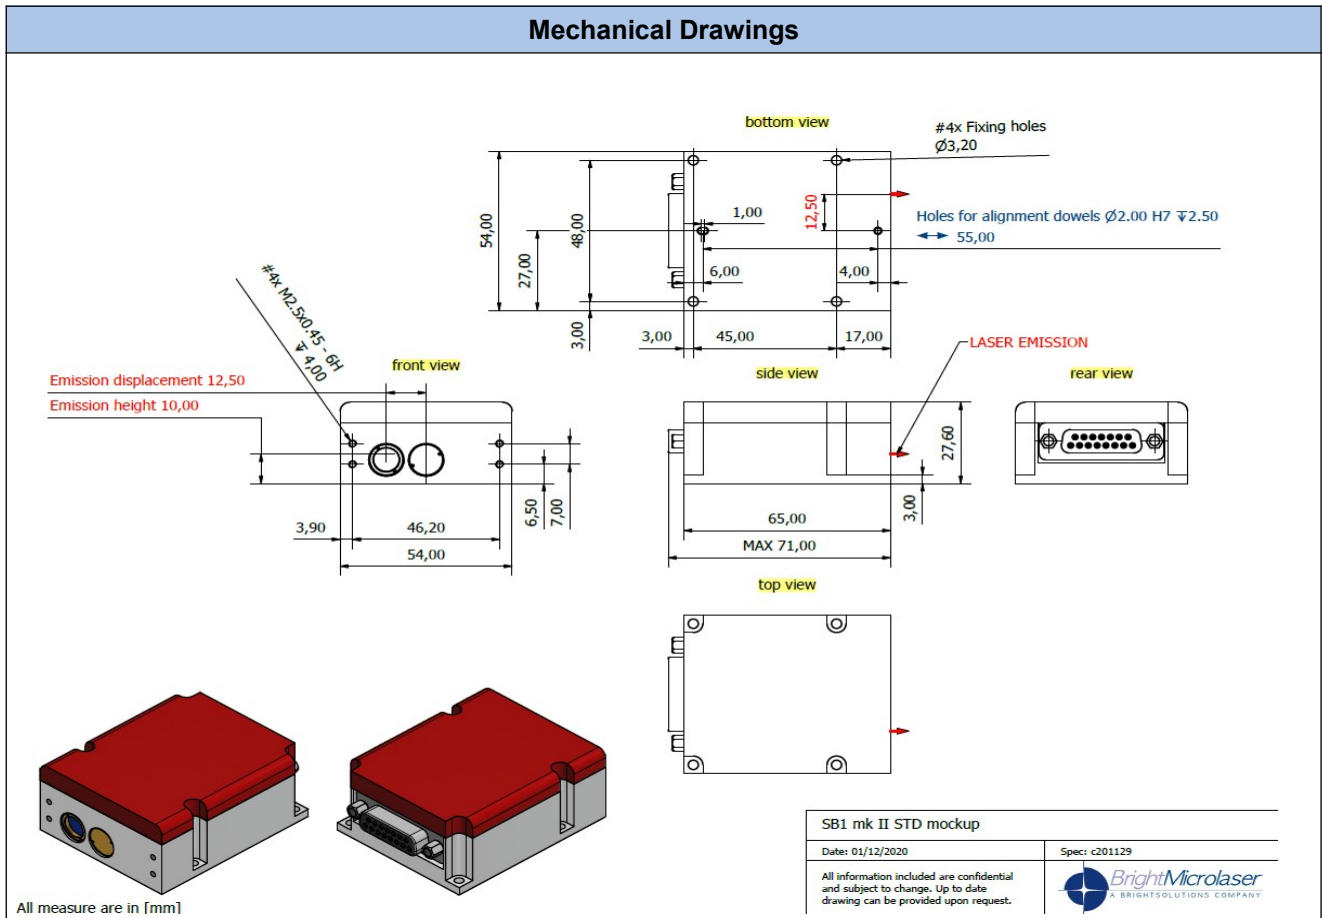

### Options Available:

- Beam Expander and Collimator
- Heat-sink
- Development kit
- Quick start/evaluation kit

All information included in this document are subject to change without notice.

Updated data sheets can be provided on request.

For further details, please contact your local **Bright Microlaser** sales representative or visit our website at [www.brightmicrolaser.com](http://www.brightmicrolaser.com)

**Bright Microlaser Srl**  
Via Artigiani, 21  
27010 Cura Carpignano - PV  
Italy  
**Phone:** +39 0382 583094  
**e-mail:** [info@brightmicrolaser.com](mailto:info@brightmicrolaser.com)