

4400 SERIES

LASERSOURCE HIGH POWER LASER DRIVER



The 4400 Series LaserSource is a high-accuracy laser driver capable of supplying up to 100A for high-power laser and LED applications. This laser driver offers QCW operation, digital I/O, temperature monitoring and industry leading laser protection systems.



PILOT LASER CONTROL

Constrant current or constant voltage operating modes



OVERLAPPING LASER PROTECTION

Including safety interlock, ESD protection, hardware limits for current & voltage, soft power-on, and intermittent contact safeguards.



QUASI-CONSTANT WAVE MODE

QCW mode provides low duty cycle, high current pulses to manage thermal loading. Pulse widths as narrow as 100 µs.



ANALOG MODULATION

Bandwidths up to 40 kHz.



MULTIPLE OPERATING MODES

Choose from: ● Constant Current ● Constant Power ● Constant Voltage



SIMPLE USER INTERFACE

Easy to Read, High Contrast VFD Display with all messages and settings in plain English. View All 3 At Once:

● Current Set Point ● Photodiode Current ● Laser Voltage

AT-A-GLANCE

Current Ranges:

- ▶ 10 Amp / 56 Volt
- ▶ 15 Amp / 28 Volt
- ▶ 20 Amp / 48 Volt
- ▶ 30 Amp / 28 Volt
- ▶ 40 Amp / 24 Volt
- ▶ 60 Amp / 14 Volt
- ▶ 80 Amp / 12 Volt
- ▶ 100 Amp / 10 Volt

High Accuracy

- ▶ Up to 0.05% of reading
+ 0.005% of scale

Low Noise

- ▶ As Low as <5 mA

Auxillary I/O

- ▶ Two Temperature Sensors
- ▶ Digital I/O
- ▶ One Form-C Relay Contact

USB / RS-232 Interface

- ▶ USB / RS-232 Connections



GROUND LOOPS: ELIMINATED. YOUR LASER IS PROTECTED.

A ground loop can destroy your laser in an instant. Every input and control circuit on the LaserSource is electrically isolated. Offset voltages, ground connections, and AC noise will never act on your system.

No other laser driver on the market has this capability.

4400

10 A TO 30 A

SPECIFICATIONS

		4400-10-56	4400-15-28	4400-20-48	4400-30-28	
CW Mode Specifications	Setpoint	Laser Current				
		Range (A)	0 – 10	0 - 15	0 - 20	0 - 30
		Resolution (A)	0.0005	0.0005	0.001	0.002
		Accuracy (\pm [% set+A])	0.05% + 0.005	0.05% + 0.0075	0.05% + 0.01	0.05% + 0.015
		Stability (ppm, time)	< 10, 1 hour			
		Temperature Coeff (ppm/°C)	50			
		Noise/Ripple (mA rms)	< 5	< 8	< 10	< 15
		Transients (mA)	< 20	< 30	< 40	< 60
		Compliance Voltage (V)	56	28	48	28
		Photodiode Current				
		Range (μ A)	25 – 20000			
	Resolution (μ A)	1				
	Accuracy (\pm [% set+ μ A])	0.05% + 2				
	Stability (ppm, time)	< 200, 24 hours				
	Temperature Coeff (ppm/°C)	< 200				
	PD Bias (V)	0 to -5V, programmable				
	Laser Voltage					
	Range (V)	0 – 56	0 – 28	0 – 48	0 – 28	
	Resolution (V)	0.001				
	Accuracy (\pm [% set+V])	0.05% + 0.005				
	Stability (ppm, time)	< 50, 1 hour				
Temperature Coeff (ppm/°C)	< 100					
External Modulation						
Input Range	0 – 10V, 10k Ω					
Modulation Bandwidth (kHz)	40	40	35	25		
QCW Mode Specifications	Setpoint	Laser Current (ACC)				
		Range (A)	0.75 – 10	1.13 - 15	1.50 - 20	2.25 - 30
		Resolution (A)	0.0005	0.0005	0.001	0.002
		Accuracy (\pm [% set+A])	0.1% + 0.010	0.1% + 0.015	0.1% + 0.020	0.1% + 0.030
		Compliance Voltage (V)	56	28	48	28
		Overshoot (%)	< 7			
	Zero Current (A)	< 0.020	< 0.030	< 0.040	< 0.060	
	Measurement	Laser Current				
		Resolution (A)	0.01			
		Accuracy (\pm [% reading+A])	2.5% + 0.025			
		Laser Voltage				
		Resolution (V)	0.01			
		Accuracy (\pm [% reading+V])	2% + 0.04			
	Parameters	Photodiode Current				
		Resolution (μ A)	10			
Accuracy (\pm [% reading+ μ A])		2% + 100				
Pulse Width						
Range / Resolution / Accuracy (ms)		0.1 – 600 / 0.001 / 0.015				
Frequency						
Range / Resolution / Accuracy (Hz)	1 – 1000 / 0.1 / 0.5					
General	Duty Cycle					
	Range (%) / Resolution (%)	0.1 – 90 / 0.1				
	Rise/Fall Times (μ s)	< 10	< 12	< 12	< 15	
General	Output Connector					
	Laser Connector	13W3, female				
	Pilot Laser Signal	On 13W3				
Auxillary Connector	DB25, female					

www.arroyoinstruments.com

4400

40 A TO 100 A SPECIFICATIONS

		4400-40-24	4400-60-14	4400-80-12	4400-100-10	
CW Mode Specifications	Setpoint	Laser Current				
		Range (A)	0 – 40	0 - 60	0 - 80	0 - 100
		Resolution (A)	0.002	0.005	0.005	0.005
		Accuracy (\pm [% set+A])	0.05% + 0.02	0.05% + 0.03	0.05% + 0.04	0.05% + 0.05
		Stability (ppm, time)	< 10, 1 hour			
		Temperature Coeff (ppm/°C)	50			
		Noise/Ripple (mA rms)	< 20	< 30	< 40	< 50
		Transients (mA)	< 80	< 120	< 160	< 200
		Compliance Voltage (V)	24	14	12	10
		Photodiode Current				
		Range (μ A)	25 – 20000			
	Resolution (μ A)	1				
	Accuracy (\pm [% set+ μ A])	0.05% + 2				
	Stability (ppm, time)	< 200, 24 hours				
	Temperature Coeff (ppm/°C)	< 200				
	PD Bias (V)	0 to -5V, programmable				
	Laser Voltage					
	Range (V)	0 – 24	0 – 14	0 – 12	0 – 10	
	Resolution (V)	0.001				
	Accuracy (\pm [% set+V])	0.05% + 0.005				
	Stability (ppm, time)	< 50, 1 hour				
Temperature Coeff (ppm/°C)	< 100					
External Modulation						
Input Range	0 – 10V, 10k Ω					
Modulation Bandwidth (kHz)	25	20	20	15		
QCW Mode Specifications	Setpoint	Laser Current (ACC)				
		Range (A)	3.00 – 40	4.5 - 60	6.0 - 80	7.50 - 100
		Resolution (A)	0.002	0.005	0.005	0.005
		Accuracy (\pm [% set+A])	0.1% + 0.040	0.1% + 0.060	0.1% + 0.080	0.1% + 0.100
		Compliance Voltage (V)	24	14	12	10
		Overshoot (%)	< 7			
	Zero Current (A)	< 0.080	< 0.120	< 0.160	< 0.200	
	Measurement	Laser Current				
		Resolution (A)	0.01			
		Accuracy (\pm [% reading+A])	2.5% + 0.025			
		Laser Voltage				
		Resolution (V)	0.01			
		Accuracy (\pm [% reading+V])	2% + 0.04			
	Parameters	Photodiode Current				
		Resolution (μ A)	10			
Accuracy (\pm [% reading+ μ A])		2% + 100				
Pulse Width						
Range / Resolution / Accuracy (ms)		0.1 – 600 / 0.001 / 0.015				
Frequency						
Range / Resolution / Accuracy (Hz)	1 – 1000 / 0.1 / 0.5					
General	Duty Cycle					
	Range (%) / Resolution (%)	0.1 – 90 / 0.1				
	Rise/Fall Times (μ s)	< 20	< 25	< 30	< 50	
General	Output Connector					
	Laser Connector	13W3, female	Bus Bar, M6	Bus Bar, M6	Bus Bar, M6	
	Pilot Laser Signal	On 13W3	DB9, female	DB9, female	DB9, female	
Auxillary Connector	DB25, female					

www.arroyoinstruments.com

4400 GENERAL SPECIFICATIONS

		General Specifications
Pilot Laser	Operating Modes	Constant Current or Constant Voltage
	Current	
	Range (mA)	0 - 500
	Resolution (mA)	1
	Accuracy (\pm [% reading+mA])	1% + 3
	Compliance Voltage (V)	> 5
	Current Limit Accuracy (\pm mA)	5
	Voltage	
	Range (V)	0 - 5
	Resolution (V)	0.01
Accuracy (\pm [% reading+V])	1% + 0.025	


Auxiliary	Temperature Sensor	
	Range (I)	100 - 45,000
	Resolution (I)	1
	Accuracy (\pm [% reading + mA])	0.5% + 10
	Relay Limits	30VDC, 1A max
Delay I/O +5 Supply	130mA Max (all Signals)	

Limits	Laser Current	
	Resolution (mA)	0.2
	Accuracy (\pm [% set + % Range])	1% + 0.5%
	Laser Voltage	
	Resolution (V)	0.1
Accuracy (\pm [% set + V])	1% + 0.2	


General	Display Type	4x20 VFD
	Chassis Interlock Connector	2-pin Phoenix
	Computer Interface	USB 2.0 Full Speed (Type B), RS-232 (DB-9, male)
	Power	90 - 240 V, 50/60 Hz
	Size (H x W x D) [inches (mm)]	3.5 (90) x 12 (305) x 14 (356)
	Weight [lbs (kg)]	13 [5.9]
	Operating Temperature	+10°C to +40°C
	Storage Temperature	-20°C to +60°C

Refer to [4400 Series LaserSource User's Manual](#) for Complete Specification

4400 REAR VIEW
13W3 LASER OUTPUT

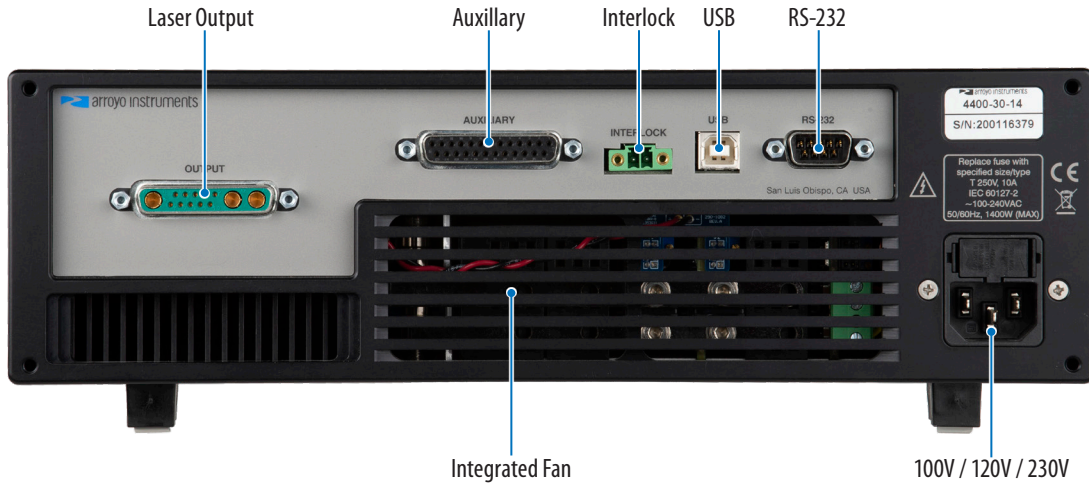

4400 REAR VIEW
BUS BAR LASER OUTPUT

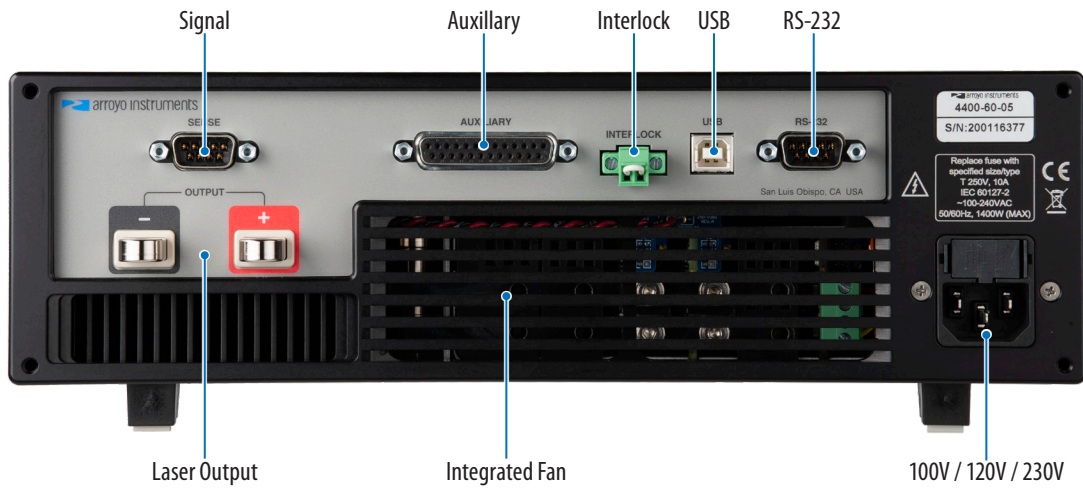

www.arroyoinstruments.com

 **arroyo instruments**
1201 Prospect Street, San Luis Obispo, CA 93401

800-644-0416
sales@arroyoinstruments.com