

LCX-532S

DPSS

Optical characteristics *


Emission wavelength	532.3 nm (± 0.3 nm)	
Wavelength stability over 8 hours and $\pm 3^\circ\text{K}$	≤ 1 pm	
Linewidth	≤ 1 MHz	
Coherence Length	≥ 100 m	
Output power	Free space	Fiber coupled
	50 mW	35 mW
	100 mW	70 mW
	150 mW	105 mW
	200 mW	140 mW
	300 mW	210 mW
Control mode(s)	Automatic Power Control	
Power stability over 8 hours and within $\pm 3\text{k}$	$\pm 1\%$	
Power adjustment range optional	Optional with L1C-MPA/AOM	
Optical noise %RMS, 10Hz - 20 MHz bandwidth	$\leq 0.2\%$	

— Transverse singlemode free-space beam


Beam waist diameter (typ) at $1/e^2$, 50mm from output aperture	0.7 mm (± 0.1 mm)
Beam divergence at $1/e^2$, full angle, in far field	≤ 1.0 (± 0.2 mrad)
Beam quality factor (M^2)	≤ 1.1
Beam circularity, in far field	$\geq 90\%$
Polarization extinction ratio (typ)	1000:1
Polarization state	linear, vertical at $\pm 5^\circ$

Fiber coupling option

Specifications	SM and PM Fiber	MM Fiber (50 μm , 0.22 NA)
Coupling Efficiency	$\geq 70\%$	$\geq 80\%$
Polarization Ratio (PMF only)	100 : 1	n/a
Fiber Output Connector	FC-ACPC/FC/PC, FCP8 on demand	FC-APC
Power stability over 8 hours and within $\pm 3\text{k}$	$\pm 2\%$	$\pm 2\%$
Fiber length	2.0 m	2.0 m

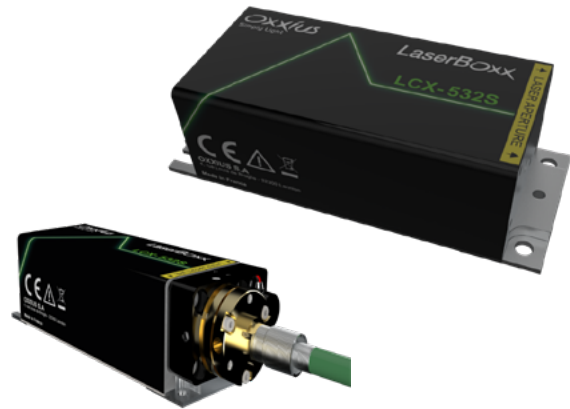

System specifications

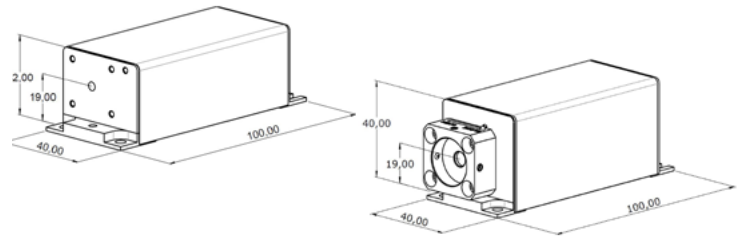

— Plug and Play version provided with :

- Electro-mechanical shutter
- ControlBoxx
- Power supply

Other options

- Heat sink

General specifications

	Plug and Play version	OEM version
Compliance	CE FDA 21 CFR 1040.10/1040.11	FDA 21 CFR 1040.10 / 1040.11
Operating temperature	10 - 38°C ambient air with optional heat sink	10 - 50°C baseplate
Power consumption	≤ 25 W	≤ 20 W
Storage temperature	0 to 60°C	
Supply voltage	100 to 240 VAC external power supply	5 to 12 VDC
Warm-up time	≤ 10 minutes	
Interfaces	USB, RS-232, dedicated electronic interface	

*specification at nominal power

Warranty : 18 months from shipment date



CONTACT US

Oxxius S.A
4 rue Louis de Broglie
F-22300 Lannion, France
Phone : +33 296 48 70 28
sales@oxxius.com
F-22300 Lannion, France
www.oxxius.com