

**635nm&520nm&445nm Tri-Wavelength Pigtailed Laser Module Output From 1pc 9um Fiber| RGB LD Module
Triplex Pigtailed Laser Module with White Light Output | Red, Green, Blue Laser Output From 9um Fiber
Triplex-RWLX-445/050m-520/050m-635/050m-9-H-T**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	-10 ~ +50	°C
Storage Temperature	T_{stg}	-40 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 445nm&520nm&635nm Tri-wavelength Output
- RGB Laser Output From 9um Fiber
- Built-in TEC Cooler
- Compact Package Size


Applications:

- Endoscopy
- Aiming Beam
- Bioscience
- Illumination



Specifications	Triplex-RWLX-445/050m-520/050m-635/050m-9-H-T		
	Wavelength-1	Wavelength-2	Wavelength-3
Center Wavelength	450nm	520nm	638nm
Output Power (CW)	50mW	50mW	50mW
Threshold Current (Typ.)	25mA	65mA	65mA
Operating Current (Typ.)	140mA	270mA	220mA
Operating Voltage	6.5V	7.5V	3.0V
Recommended Operating Temperature	25°C		
TEC Max Current	3.5A		
TEC Max Voltage	7.0V		
Thermistor	10K		
Fiber Type	SMF-28		
Fiber Core Diameter	9um		
Fiber Length	>80cm		
Connector Type	FC/SMA905		
Package	HHL-01		

Package View

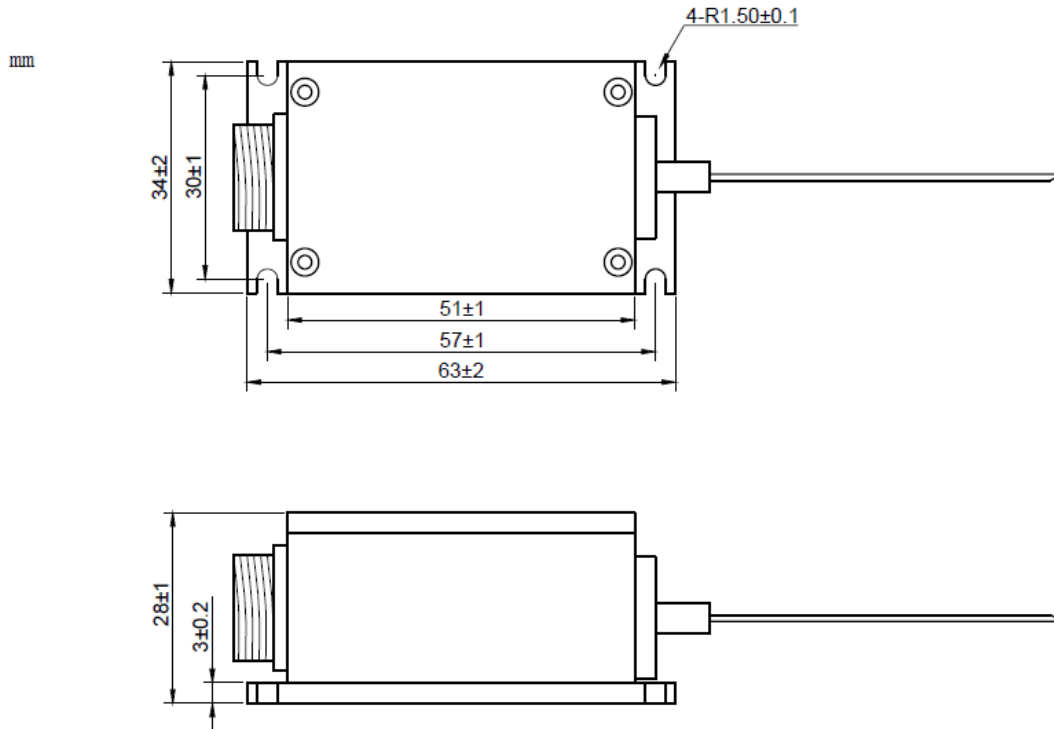

We offer Customized 445nm & 520nm & 635nm Tri-Wavelength Module Which is output from one 9um Fiber.

- Customized Output Power (Such as 30mW@445nm & 30mW@520nm & 30mW@635nm)
- Built-in TEC Cooler Optional
- Fiber Detachable Package Optional

Caution
On operation, if optical connectors are unterminated, modules can emit invisible laser radiation. Radiation emitted by laser devices can be dangerous to the eyes. Avoided eye or skin exposure to direct or scattered radiation

