
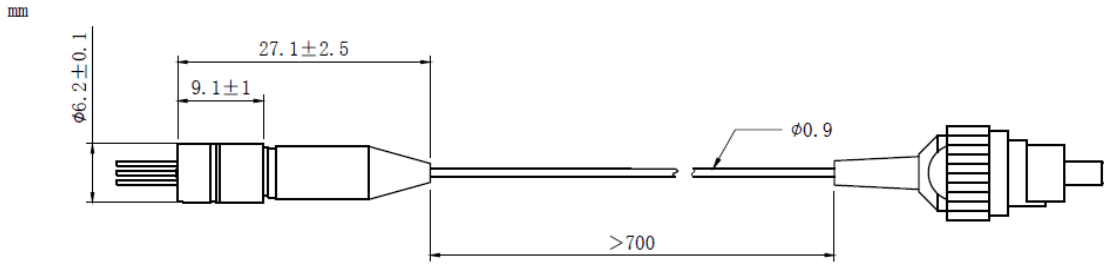



1590nm 5mW Pigtailed Laser Module with Polarization maintaining Fiber (PM Fiber)
1590nm PM Fiber Coupled LD Module with Coaxial Package (9um Single Mode PM Fiber)
RWLP-1590-005m-PM-DFB-ISO

PARAMETER	SYMBOL	VALUE	UNIT
LD Reverse Voltage	V_r	2.0	V
PD Reverse Voltage	$V_{r(PD)}$	15	V
Operating Temperature	T_{op}	-20 ~ +50	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> ● 1590nm ● DFB Laser Diode ● Built-in Photodiodes ● Built-in Isolator ● High Reliability ● High Polarization Extinction Ratio 			
Applications: <ul style="list-style-type: none"> ● Test Equipments ● Optical Transmitter of Analog Signal ● Optical Transmitter of Data Signal 			
Specifications	RWLP-1590-005m-PM-DFB-ISO		
	Min	Type	Max
Center Wavelength@25°C	±3nm	1590nm	±10nm
Spectral Width(FWHM)	----	0.3nm	1nm
Output Power	----	5mW	----
Fiber Type	Polarization Maintaining Fiber		
Fiber Core	9um		
Recommended Operation Temperature	25°C		
Polarization Extinction Ratio	13dB	15dB	----
Connector	FC/APC		
Threshold Current (Typ.) I_{th}	----	5mA	15mA
Operating Current	----	70mA	80mA
Operating Voltage	----	1.4V	1.7V
Optical Isolation	30dB		
Fiber Length	>80cm		
Package Style	Coaxial or B86		
High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.			


Coaxial Package View: (Part Number: RWLP-1590-005m-PM-DFB-ISO)



B86 Package View: (Part Number: RWLP-1590-005m-PM-B-DFB-ISO)

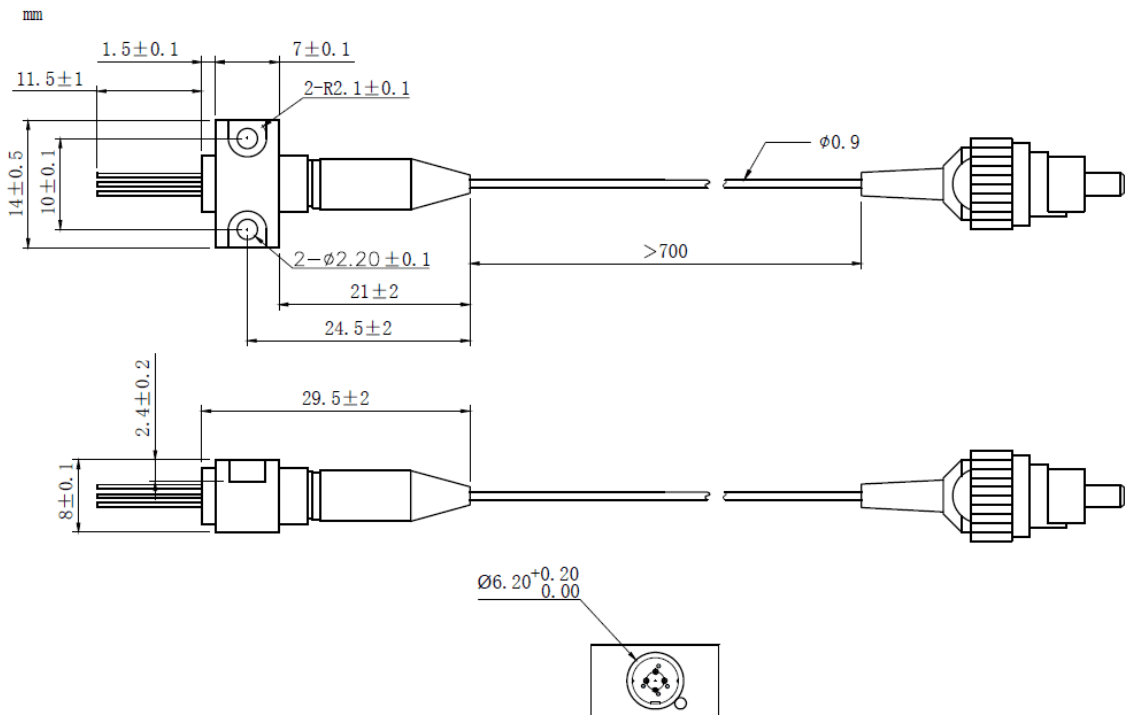

Bottom View: (A-Type)

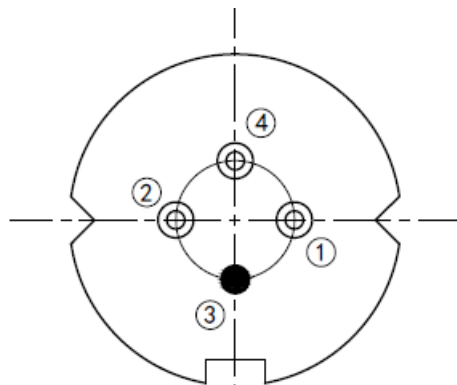

PIN 1	PD (+)
PIN 2	LD (-)
PIN 3	LD (+), CASE
PIN 4	PD (-)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

