
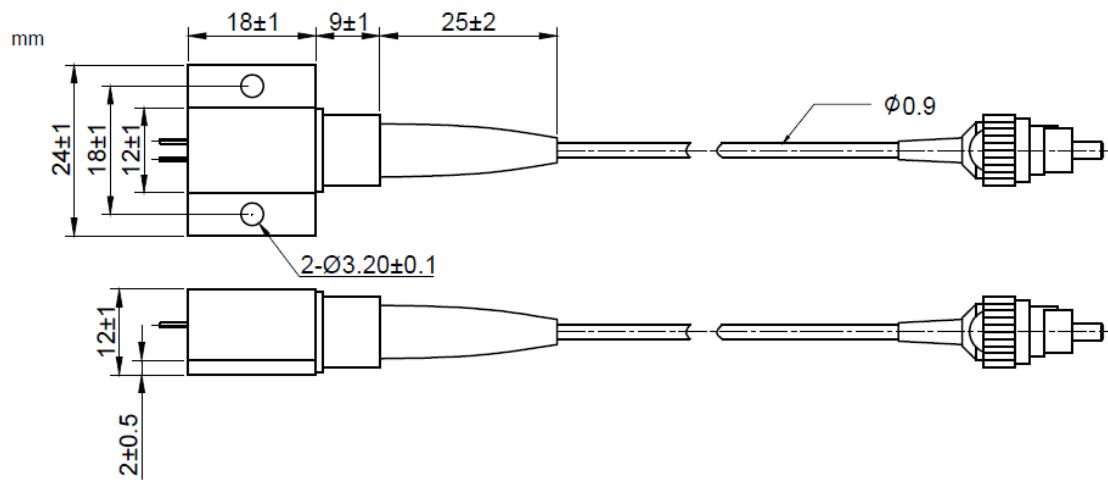


**525nm 1W~1.2W Fiber Coupled Diode Laser Module| Green Laser Diode**
**515nm~530nm 1200mW Pigtailed Laser Diode| 50um, 105um 200um MM Fiber| PD Optional  
RWLP-525-1200m-M**

<b>525nm Pigtailed Diode Laser</b>		<b>1.2W/MM Fiber</b>				
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>VALUE</b>		<b>UNIT</b>		
MAX Reverse Current	I <sub>r</sub>	80		mA		
Operating Temperature	T <sub>op</sub>	0~+60		°C		
Storage Temperature	T <sub>stg</sub>	-40~+85		°C		
Lead soldering temperature (10 sec.)	T <sub>ls</sub>	260		°C		
<b>Features:</b>	<ul style="list-style-type: none"> <li>• 525nm</li> <li>• B9 Package</li> <li>• TEC Cooling Optional</li> <li>• Photodiodes Optional</li> </ul>					
<b>Applications:</b>	<ul style="list-style-type: none"> <li>• Medical Laser Treatment</li> <li>• Laser Show</li> <li>• Others</li> </ul>					
<b>Specifications</b>	<b>RWLP-525-1200m-M</b>					
	Min	Type	Max			
Center Wavelength@25°C	525nm±10nm					
Spectral Width (FWHM)	----	3.0nm	----			
Output Power	1W	1.2W	----			
Fiber Type	Multi-mode Fiber					
Fiber Core	105um (50um, 200um, 400um Optional)					
Recommended Operating Temperature	25°C					
Fiber Connector	FC/ST/SMA905					
Fiber Length	>80cm					
Threshold Current (Typ.)	----	0.2A	0.6A			
Operating Current (Typ.)	----	2.1A	2.3A			
Operating Voltage	----	5.0V	6.0V			
Package Style	B9					
Built-in Photodiode	Optional					
Built-in TEC Cooling	Optional					

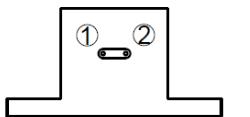

**B9 Package View:**

**PIN Bottom View:**


PIN	DEF
1	LD(-)
2	LD(+)

**Electrically shorten LD module and store in non-extreme conditions.**

Suggest using the constant current power supply.

