
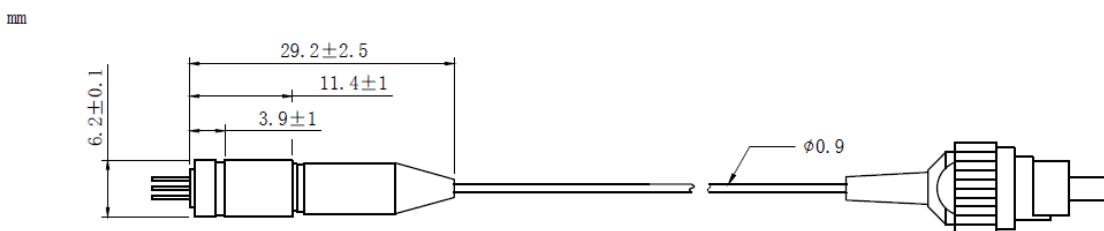

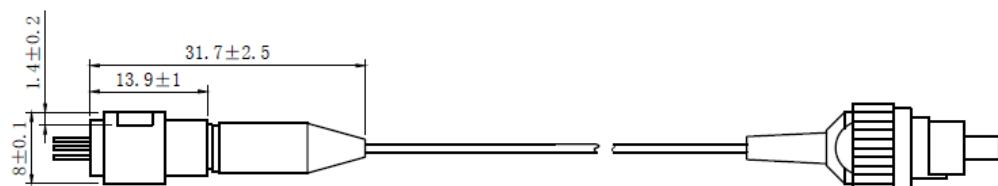
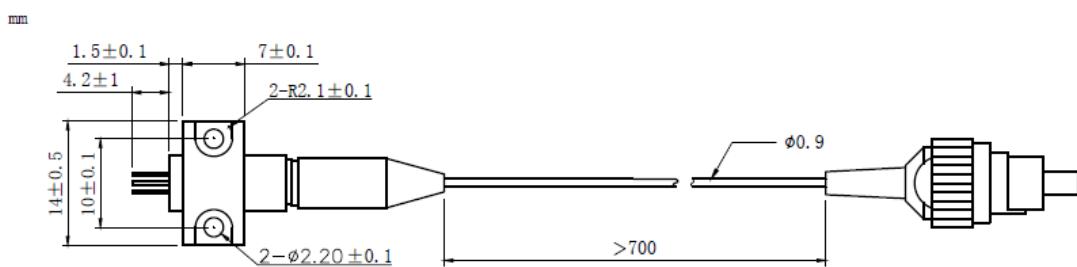


**670nm 5mW PM Fiber Coupled Laser Diode with Coaxial Package | Red Laser Diode**  
**670nm~675nm 5mW Coaxial Pigtailed LD with Polarization Maintaining Fiber (SM Fiber)**  
**RWLP-670-005m-PM-PD**

<b>670nm Pigtailed Diode Laser</b>		<b>5mW/PM Fiber</b>	
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>VALUE</b>	<b>UNIT</b>
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	-10 ~ +60	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C
<b>Features:</b>	<ul style="list-style-type: none"> <li>● 670nm</li> <li>● PM Fiber</li> <li>● High Reliability</li> <li>● High Polarization Extinction Ratio</li> </ul>		
<b>Applications:</b>	<ul style="list-style-type: none"> <li>● Biological Instruments</li> <li>● Analytical Equipment</li> <li>● Others</li> </ul>		
<b>Specifications</b>	<b>RWLP-670-005m-PM-PD</b>		
	<b>Min</b>	<b>Type</b>	<b>Max</b>
Center Wavelength@25°C	±5nm	670nm	±10nm
Recommended work Temperature	25°C		
Output Power	----	5mW	----
Fiber Type	Polarization Maintaining Fiber		
Fiber Core	4μm		
Polarization Extinction Ratio	13dB	15dB	----
Monitor Current	----	0.5mA	----
Fiber Connector	FC/APC		
Fiber Length	----	80cm	100cm
Threshold Current (Typ.)	----	20mA	35mA
Operating Current (Typ.)	----	38mA	45mA
Operating Voltage	----	2.4V	3.0V
Package Style	Coaxial or B82		
High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.			

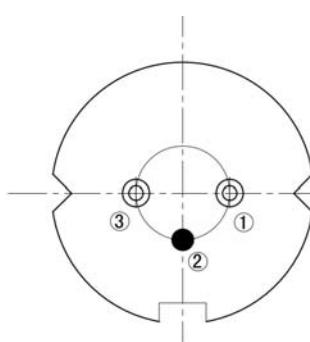

**Coaxial Package View: (Part Number: RWLP-670-005m-PM-PD)**

**B82 Package View: (Part Number: RWLP-670-005m-PM-B-PD)**

**PIN Bottom View:**


1	LD(-)
2	LD(+) & PD(-)
3	PD(+)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

