


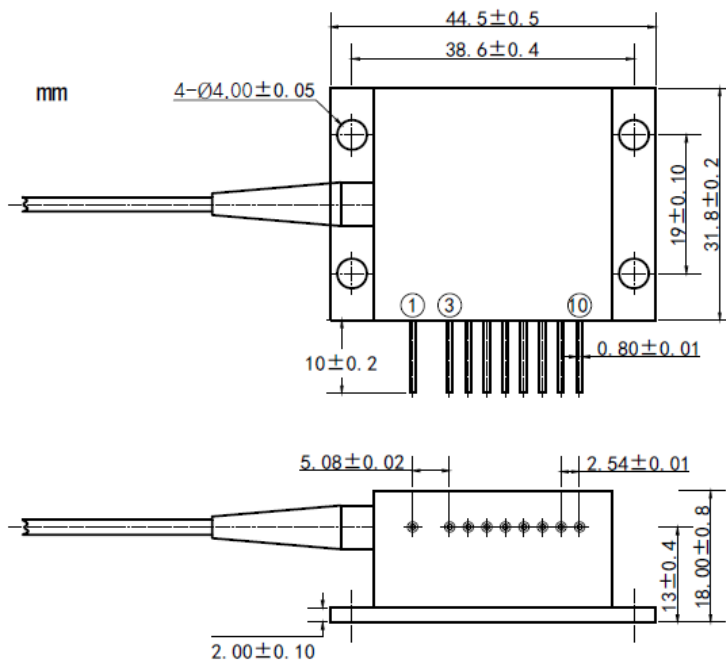
445nm~450nm 3.5W HHL Package Fiber Coupled Diode Laser With MM Fiber | Blue Laser Diode
445nm 3.5W | 9-Pin HHL Package | 105um, 200um Fiber Optional |TEC Cooling | Built-in PD
RWLX-445-3500m-M-H9-T-PD

PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Current	I_r	80	mA
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features: <ul style="list-style-type: none"> ● 445nm ● 3.5W Output Power ● Built-in TEC Cooling ● Built-in PD ● High Stability 	
Applications: <ul style="list-style-type: none"> ● Medical Laser Treatment ● Others 	

Specifications	RWLX-445-3500m-M-H9-T-PD		
	Min.	Type	Max.
Center Wavelength@25°C	445nm±10nm		
Spectral Width (FWHM)	----	3nm	----
Output Power	3W	3.5W	----
Recommend Operating Temperature	25 °C		
Threshold Current (Typ.)	----	0.3A	0.5A
Operating Current (Typ.)	----	3.0A	3.3A
Operating Voltage		4.5V	5.5V
TEC Max Current	6A		
TEC Max Voltage	9.8V		
Fiber Type	Multi-mode Fiber		
Fiber Core	105um (200um optional)		
Fiber Length	>80cm		
Connector Type	SMA905/FC		
Photodiode	Built-in		

9-PIN HHL Package View



PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

We offer Customized 445nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional
(such as 500mw@445nm+10W@980nm)

Contact us with info@rpmclasers.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

