
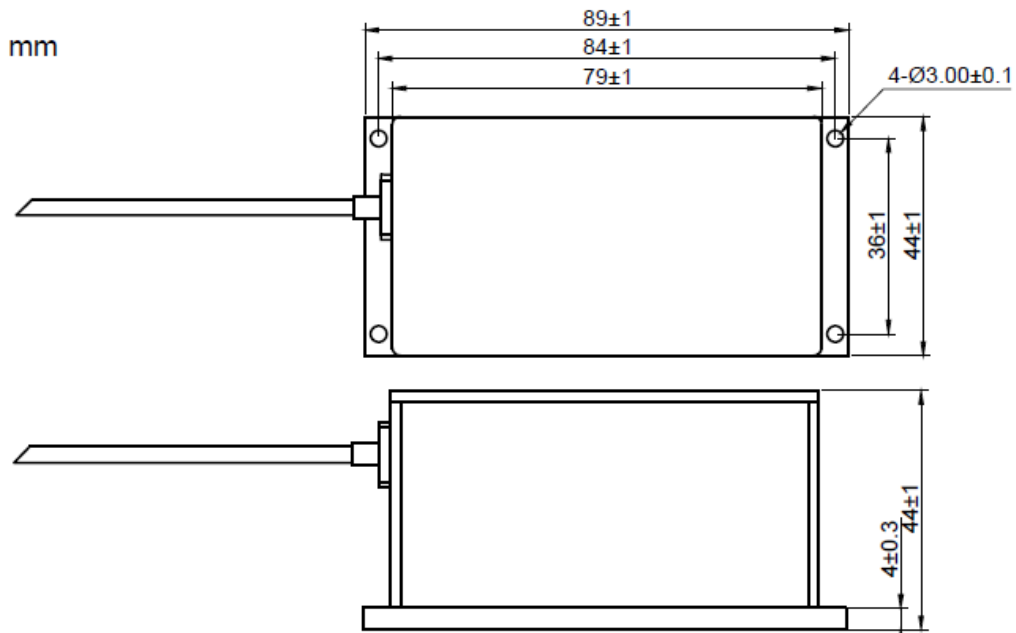


465nm~470nm 15W Fiber Coupled Laser Diode (LD) Module with HHL Package | 465nm Blue Laser Module
460nm~465nm | 15W Output Power| With Single 400um Multi-mode Fiber| Built-in TEC Cooler Optional
RWLX-465-015-400M-H

PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Current	I_r	80	mA
Operating Temperature	T_{op}	0~ +60	°C
Storage Temperature	T_{stg}	-40~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> • 465nm • 15W Output Power • Built-in TEC Cooler Optional • Built-in Photodiode Optional • Stainless Steel Armor Optional 			
Applications: <ul style="list-style-type: none"> • Medical Laser Treatment • Laser Show • Others 			
Specifications		RWLX-465-015-400M-H	
	Min.	Type	Max.
Center Wavelength@25°C	455nm	465nm	475nm
Spectral Width (FWHM)	----	8nm	----
Output Power	----	15W	----
Temperature Coefficient of Wavelength	----	0.05nm / °C	----
Threshold Current (Typ.)	----	0.4A	0.6A
Operating Current (Typ.)	----	2.5A	3.0A
Operating Voltage	----	36V	44V
Fiber Core Diameter	400um		
Fiber Numerical Aperture	0.22		
Fiber Length	>80cm		
Connector Type	SMA905/ST/FC		
Package	P5 Package		

P5 Package View



We offer **Customized** 465nm Fiber Coupled LD. Please let me know your special request:

- Customized Output Power
- Customized Fiber
- Customized Fiber Connector

Contact us with info@rpmclasers.com

Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.

