


940nm~950nm 100mW High Power SM Coaxial Pigtailed Laser Diode with 9um Fiber

940nm | 100mW | SM Fiber Coupled Diode Laser Module With SMF-28 Fiber | Built-in PD |9um Fiber Core



RWLP-940-100m-9-PD

940nm Pigtailed Diode Laser		100mW/9um	
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	-10~+60	°C
Storage Temperature	T_{stg}	-40~+85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> 🔸 940nm 🔸 9um Fiber 🔸 Coaxial or B82 Package 🔸 Built-in PD 			
Applications: <ul style="list-style-type: none"> 🔸 Medical Laser Treatment 🔸 Sensor 🔸 Others 			
Specifications	RWLP-940-100m-9-PD		
	Min	Type	Max
Center Wavelength@25°C	940nm±15nm		
Recommended Operating Temperature	25°C		
Output Power	----	100mW	----
Fiber Type	SMF-28		
Fiber Core	9um		
Monitor Current	----	0.3mA	----
PD Reverse Voltage	----	----	30V
Fiber Connector	FC/SC/SMA905		
Fiber Length	>80cm		
Threshold Current (Typ.)	----	30mA	55mA
Operating Current (Typ.)	----	380mA	400mA
Operating Voltage	----	2.2V	3.0V
Package Style	Coaxial or B82		
Photodiodes	Built-in		


Coaxial Package View: (Part Number: RWLP-940-100m-9-PD)



B82 Package View: (Part Number: RWLP-940-100m-9-B-PD)

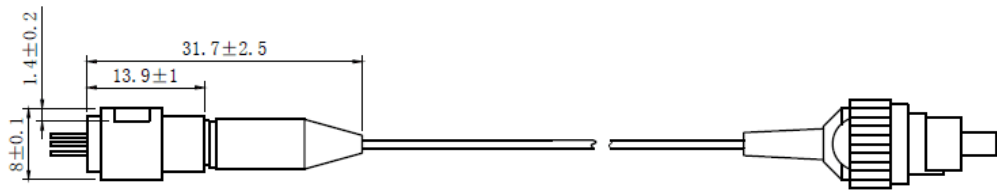

PIN Bottom View:

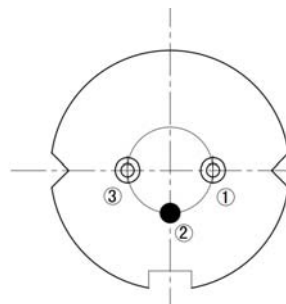

1	LD(-)
2	LD(+)&PD(-)
3	PD(+)

Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.

