


**435nm~440nm 3W HHL Package Fiber Coupled Diode Laser With MM Fiber | Blue Laser Diode**  
**435nm 3W | 9-Pin HHL Package | 105um, 200um Fiber Optional |TEC Cooling | Built-in PD**  
**RWLX-435-003-M-H9-T-PD**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	0 ~ +30	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C
<b>Features:</b> <ul style="list-style-type: none"> <li>● 435nm</li> <li>● 3W Output Power</li> <li>● Built-in TEC Cooling</li> <li>● Built-in PD</li> <li>● High Stability</li> </ul>			
<b>Applications:</b> <ul style="list-style-type: none"> <li>● Medical Laser Treatment</li> <li>● Others</li> </ul>			
<b>Specifications</b>	<b>RWLX-435-003-M-H9-T-PD</b>		
	Min.	Type	Max.
Center Wavelength@25°C	435nm±10nm		
Spectral Width (FWHM)	----	3nm	----
Output Power	----	3W	----
Recommend Operating Temperature	25 °C		
Threshold Current (Typ.)	----	0.3A	0.6A
Operating Current (Typ.)	----	3.0A	3.2A
Operating Voltage		4.5V	5.5V
TEC Max Current	6A		
TEC Max Voltage	9.8V		
Fiber Type	Multi-mode Fiber		
Fiber Core	105um (200um optional)		
Fiber Length	>80cm		
Connector Type	SMA905/FC		
Photodiode	Built-in		

### 9-PIN HHL Package View

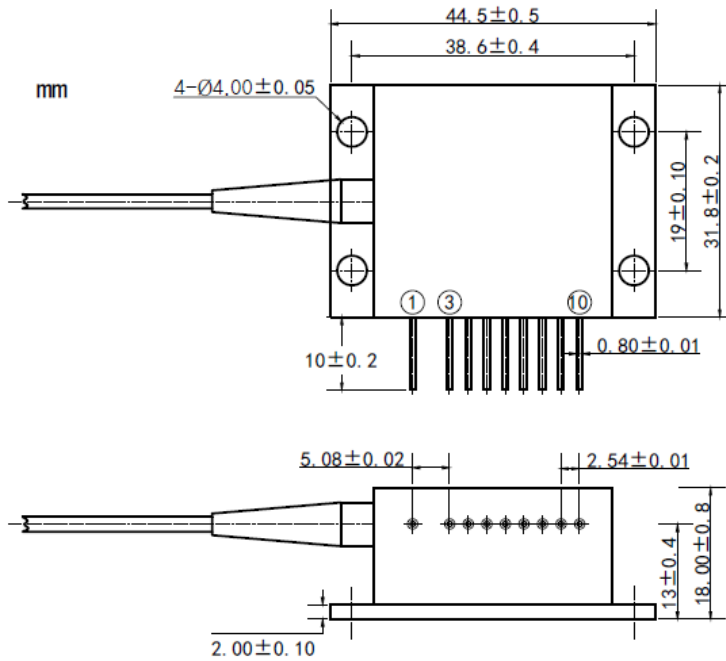

PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

### We offer Customized 435nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional  
(such as 3W@435nm+ 10W@980nm)

Contact us with [info@rpmclasers.com](mailto:info@rpmclasers.com)

Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.

